

KD-R320

CD Receiver with Dual AUX

Headunits



MP3/WMA

MOS-FET
50W x 4

20W x 4
RMS



Recommended Features



Key Benefits


The unit comes with dual AUX inputs, allowing easy connection with the optional Bluetooth® adapter and other devices. Simple operation using the menu key and the volume knob lets you easily search songs etc. MOS-FET power amp, 24-bit DAC, and High-Pass Filter ensure quality sound. You can also adjust the sound to your taste with the 3-band parametric iEQ.

*Dual AUX-IN


AUX inputs are available on both front and rear panels. By connecting the optional adapter, Bluetooth® Wireless Technology will be available on the headunit.



Front



Rear

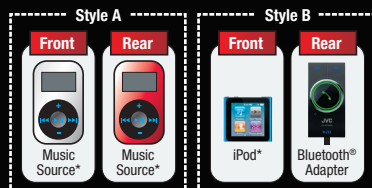

* Optional mini jack cable required

*Ready for Bluetooth® Adapter (KS-BTA100)

With the optional KS-BTA100 adapter, you can enjoy the safety and convenience of Bluetooth® Wireless Technology such as hands-free calling, voice dialing, and audio streaming. The compact all-in-one adapter has microphone/keys/LED functions, and can be easily connected via the AUX.



Hands-Free Calls
- Voice Dialing

- Redial Call
- Private Mode

Audio Streaming
- Noise/Echo Cancellation

JVC


MOBILE ENTERTAINMENT

KD-R320 *CD Receiver with Dual AUX*

★ 3-Band Parametric iEQ

Adjusts the center frequency, bandwidth and levels at each of 3 bands. Plus 5 factory and 1 user EQ presets. With Pro mode, the EQ can customize the sound for your ears. A separate setting for the subwoofer level is also available.

Control Range	Bass:	60Hz, 80Hz, 100Hz, 200Hz
	Mid-range:	500Hz, 1kHz, 1.5kHz, 2.5kHz
	Treble:	10kHz, 12.5kHz, 15kHz, 17.5kHz
Level		-6~+6dB
Q (band with)		0.75~2.0Q



★ MP3/WMA Playback

Compatible with compressed audio formats.



★ High-Pass Filter

High-Pass Filter lets you control high-frequency sound settings by filtering out frequencies below the cutoff level.



★ Detachable Face

With JVC headunits, you can easily remove the control panel and take it with you for security.



★ Separated Brightness Control (32 steps)

With JVC's CD receivers, you can easily control the brightness separately for left and right in 32 steps, for increased safety or to suit the car environment.

★ Variety Beep Tone Support (6 tones)

JVC's CD Receivers have 6-tone beep support for a safe drive and easy operation.



Key Specifications

Maximum Power Output	50W x 4
Continuous Power Output (RMS)	20W RMS x 4 Channels at 4Ω ≤
*1 Total Harmonic Distortion	1.0% THD*1 + N
HPF*2 (Rear)	Off/On
LPF (Subwoofer)	off / 55 / 85 / 120Hz (-12dB/oct)
Line Pre-Output Terminals	1 (Rear/Subwoofer Selectable)
Subwoofer Output with Level/Frequency Control	✓ (Rear/Subwoofer Selectable)
Line Output Level	2.5V
Subwoofer Output Level	2.5V
Subwoofer Gain Control	INF - 0dB*3
Load Impedance	4Ω (4 - 8Ω allowable)
Line Output Impedance	≤ 600Ω

*2 Set according to LPF figures *3 MUTE / -14dB / -12dB / -10dB / -8dB / -6dB / -4dB / -2dB / 0dB

Dimensions (W x H x D)

Installation Size	7 3/16" x 2 1/16" x 6 5/16"	182 x 52 x 159 mm
Panel Size	7 7/16" x 2 3/8" x 3/8"	188 x 58 x 8.5 mm
Detachable Face Plate	6 3/4" x 1 13/16" x 7/8"	170 x 46.4 x 21.1 mm

Connections

