


Activate wireless pairing

When you use the subwoofer (and wireless receiver unit*) for the first time, activate wireless pairing.

- 1** Connect the supplied AC adapter to the DC IN jack on the center unit (and wireless receiver unit*). Then connect the supplied AC power cord to the AC adapter, and plug it in to a wall outlet.

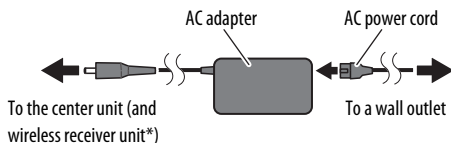

- 2** Plug in the power cord of the subwoofer to a wall outlet.

- 3** Turn on the System.

Front panel of the center unit



Press.

- 4** Activate the wireless pairing on the center unit.

Front panel of the center unit

INPUT



Press and hold for 4 seconds.




"**" blinks on the display.

The POWER ON lamps on the subwoofer and wireless receiver unit* turns blue.

- 5** While "**" is blinking, activate the wireless pairing on the subwoofer.

Rear side of the subwoofer



Press using a ball-point pen etc.



"OK" appears on the display of the center unit.


- You may need to press the button repeatedly until "OK" appears on the display.
- If "**" stops blinking before the wireless pairing is completed, return to step 4.

Only for TH-BA3:

- 6** Repeat step 4.

- 7** While "**" is blinking, activate the wireless pairing on the wireless receiver unit.

Rear side of the wireless receiver unit



Press using a ball-point pen etc.



"OK" appears on the display of the center unit.

- You may need to press the button repeatedly until "OK" appears on the display.
- If "**" stops blinking before the wireless pairing is completed, return to step 6.

Now, you can use the subwoofer (and wireless receiver unit*).

Sound comes out through the subwoofer (and surround speakers*) when an audio signal comes in to the center unit.

- Wireless pairing is not canceled even if the AC power cords are pulled out from the wall outlet.

* Only for TH-BA3